

Pulsation Damper PTFE Diaphragm, PVDF Lined Stainless for Low Pressure

PTFE Diaphragm Pulsation Damper with Non-Metallic Wetted Parts.
Low Pressure FlexOrder series, The Lined Range



1 Standard Pre-Fill valve as used where "Fail Safe" option is prohibited by CE regulations.

NITROGEN Only use air when there are no hydrocarbons that could cause a diesel explosion

LIQUID Liquids that are highly corrosive of metals

PTFE VIRGIN* TEFLON OR FLEXFLOW

ELASTOMER BACKING Fluoro Carbon, Hypalon, EPDM, Nitrile, Silicon R.



STEEL SA 106 Gr. B SA 516 Gr. 60

STAINLESS 316L grade (No titanium "kill")

PLASTICS PVC, Poly Prop., Glass filled PTFE, PVDF etc

LININGS PVDF, Kynar, Halar, PTFE etc.


* E.I. DUPONT DE NEMOURS AND CO. INC.
 FLEXFLOW LIQUID DYNAMICS INTERNATIONAL INC.

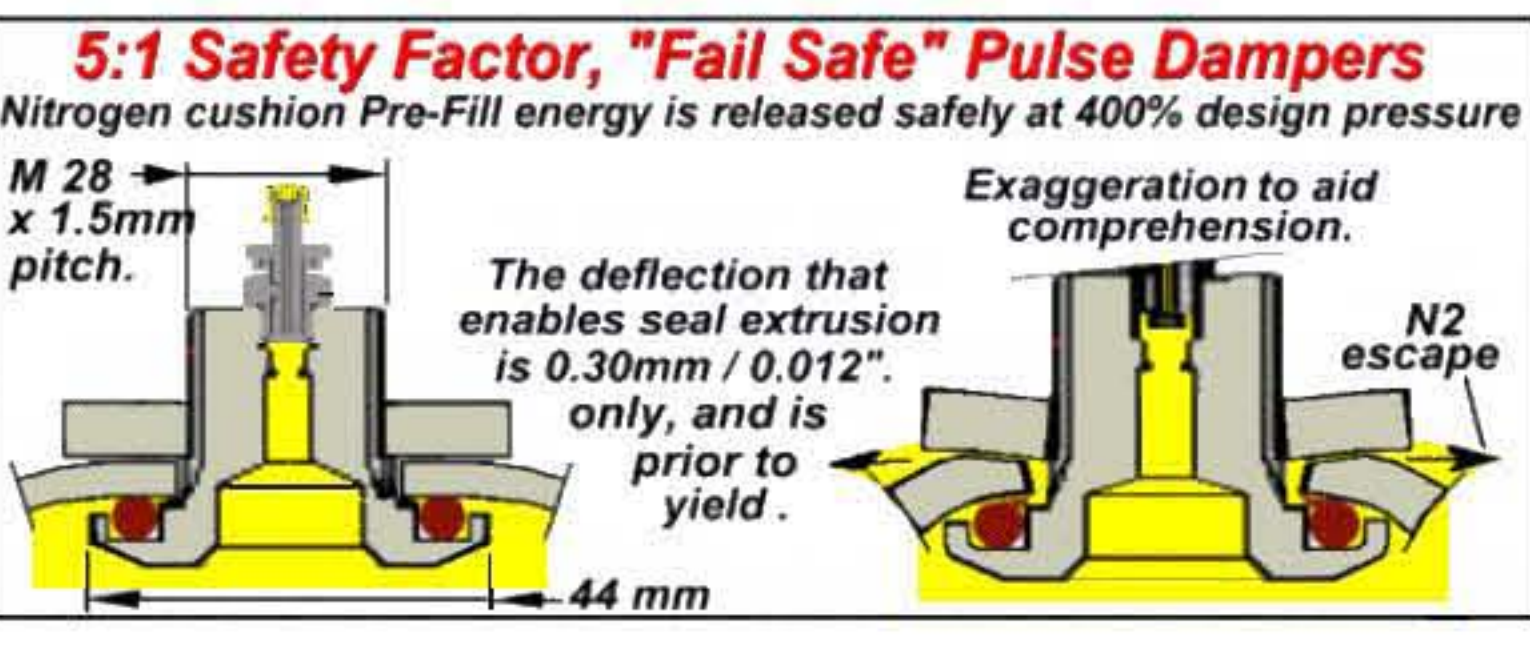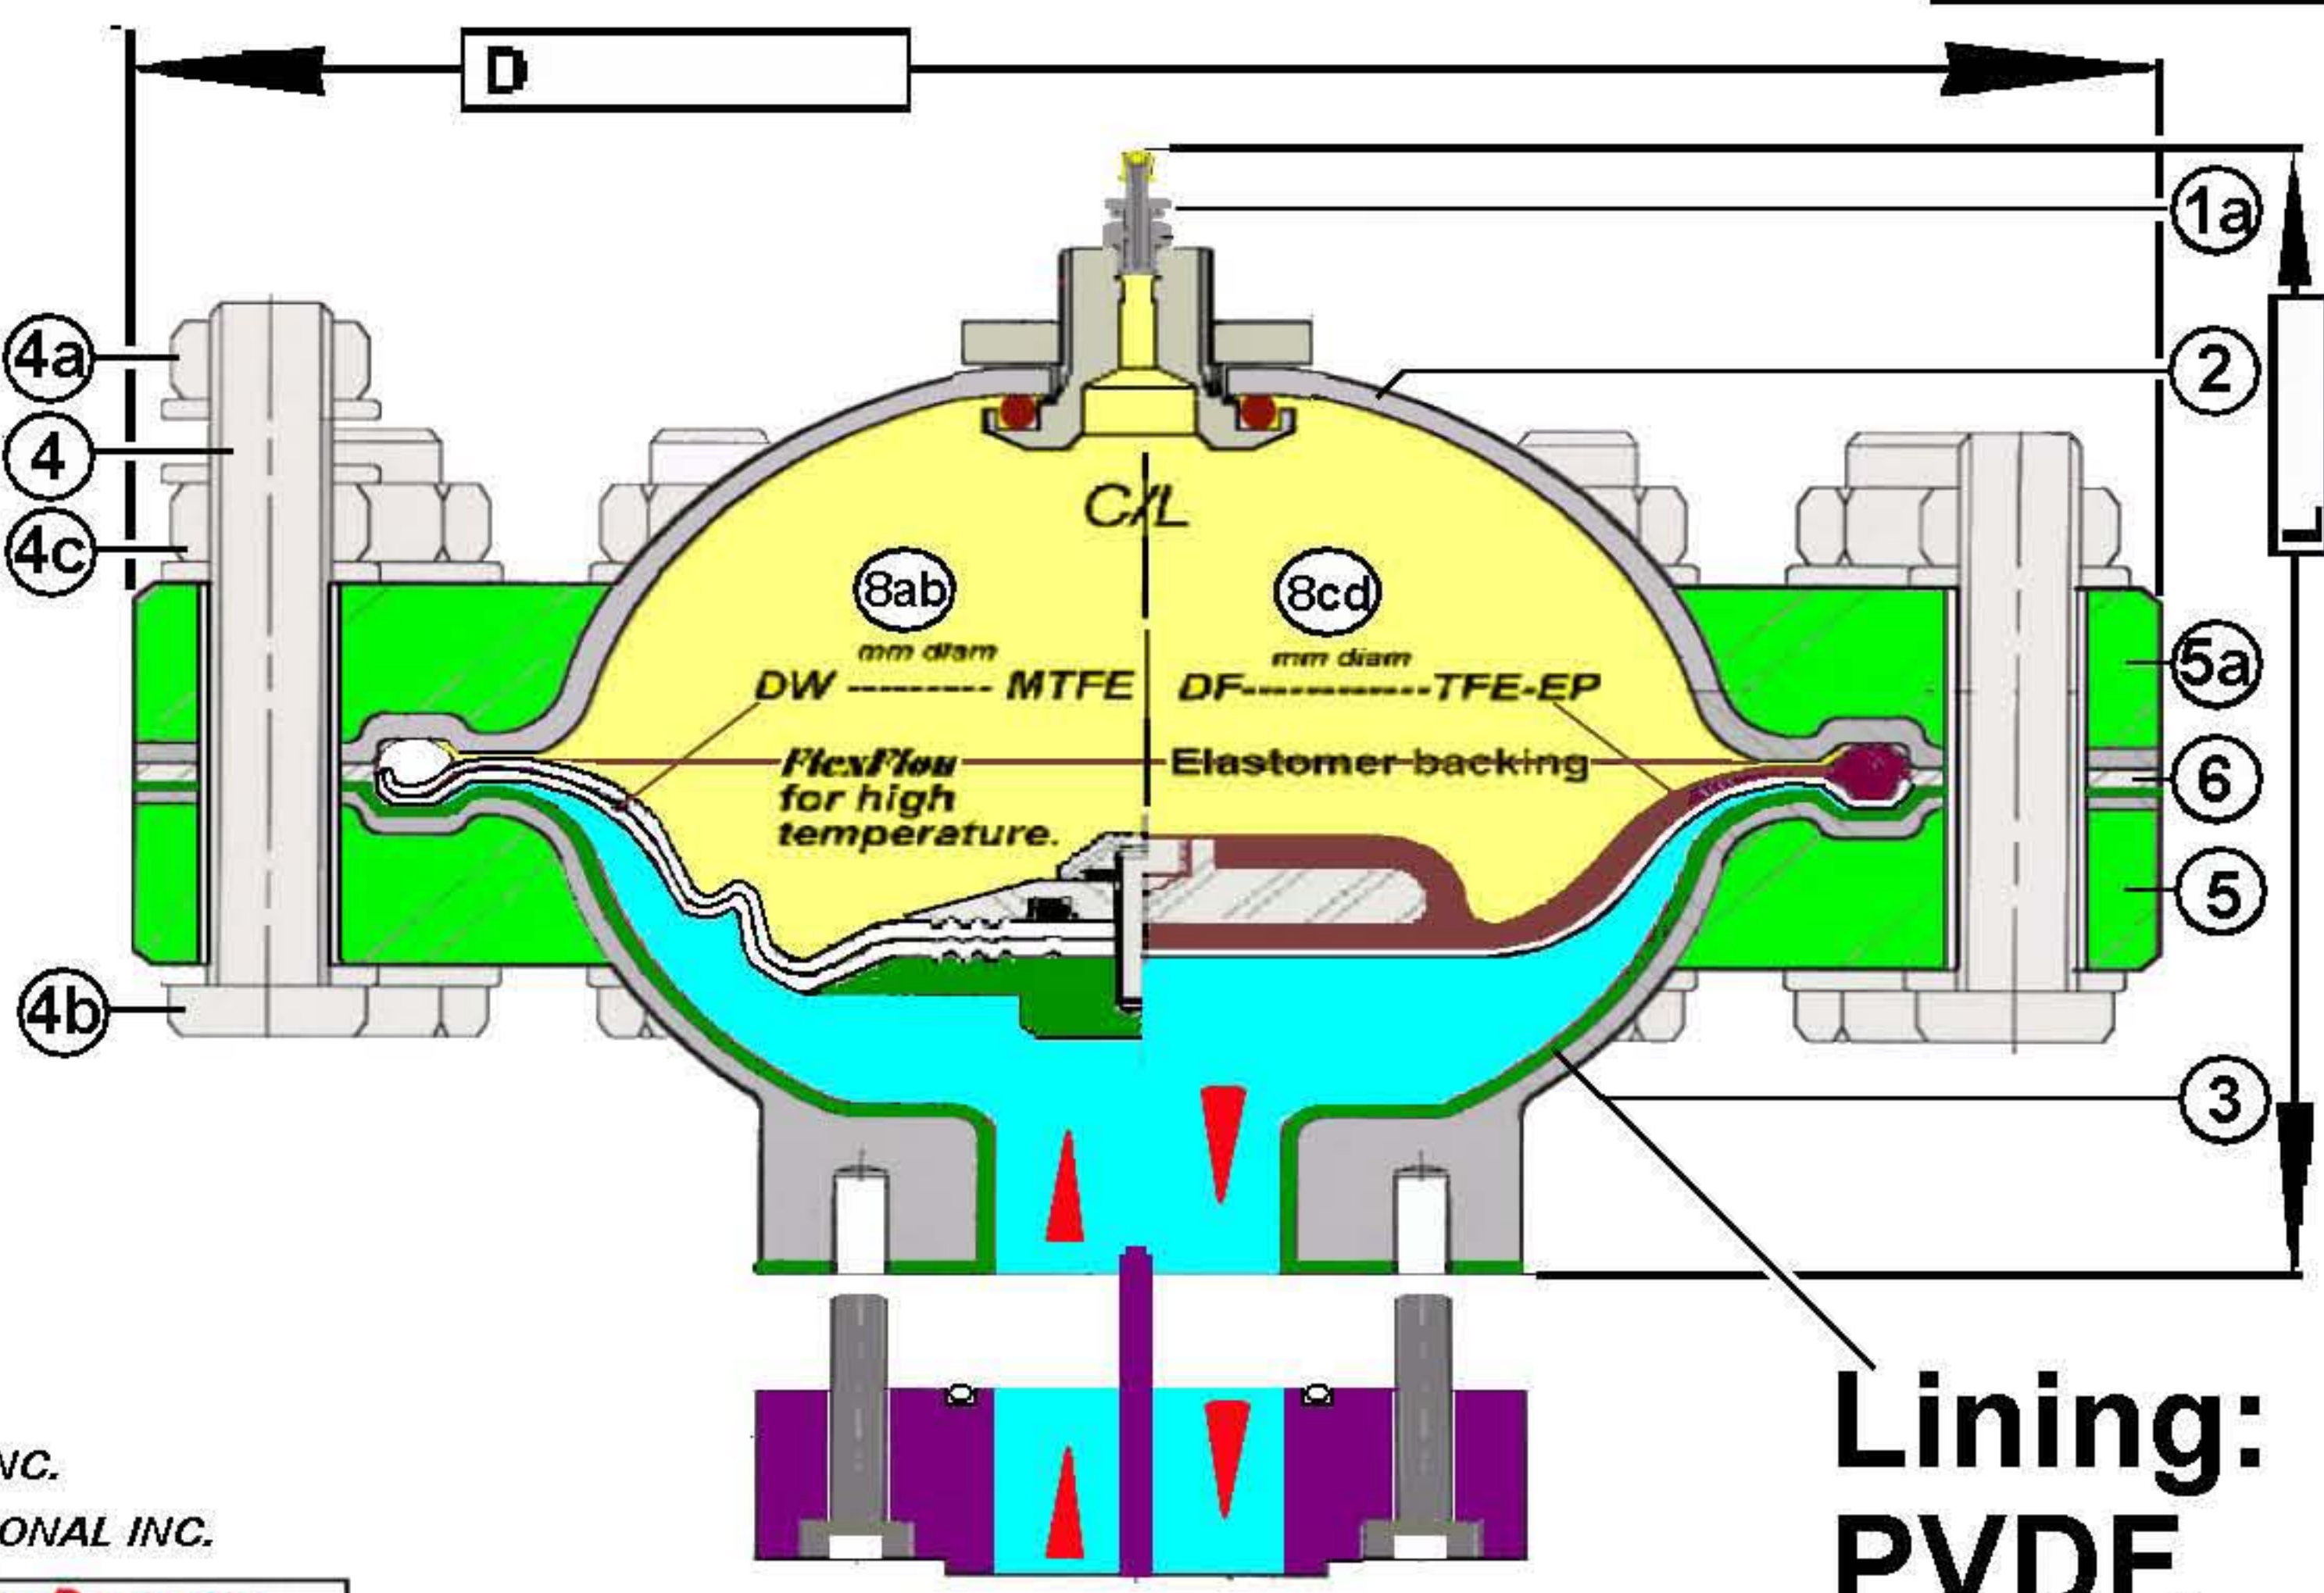

System Connection Block from any machinable material

Lining: PVDF, Kynar, etc.

OPTIONAL, PIPING BASE BLOCK, for:
 Pulse Filtration Interception -- And -- Improved in place Flushability.
 Maintains system integrity during service.
 With additional Flanges In Stead of system "T".

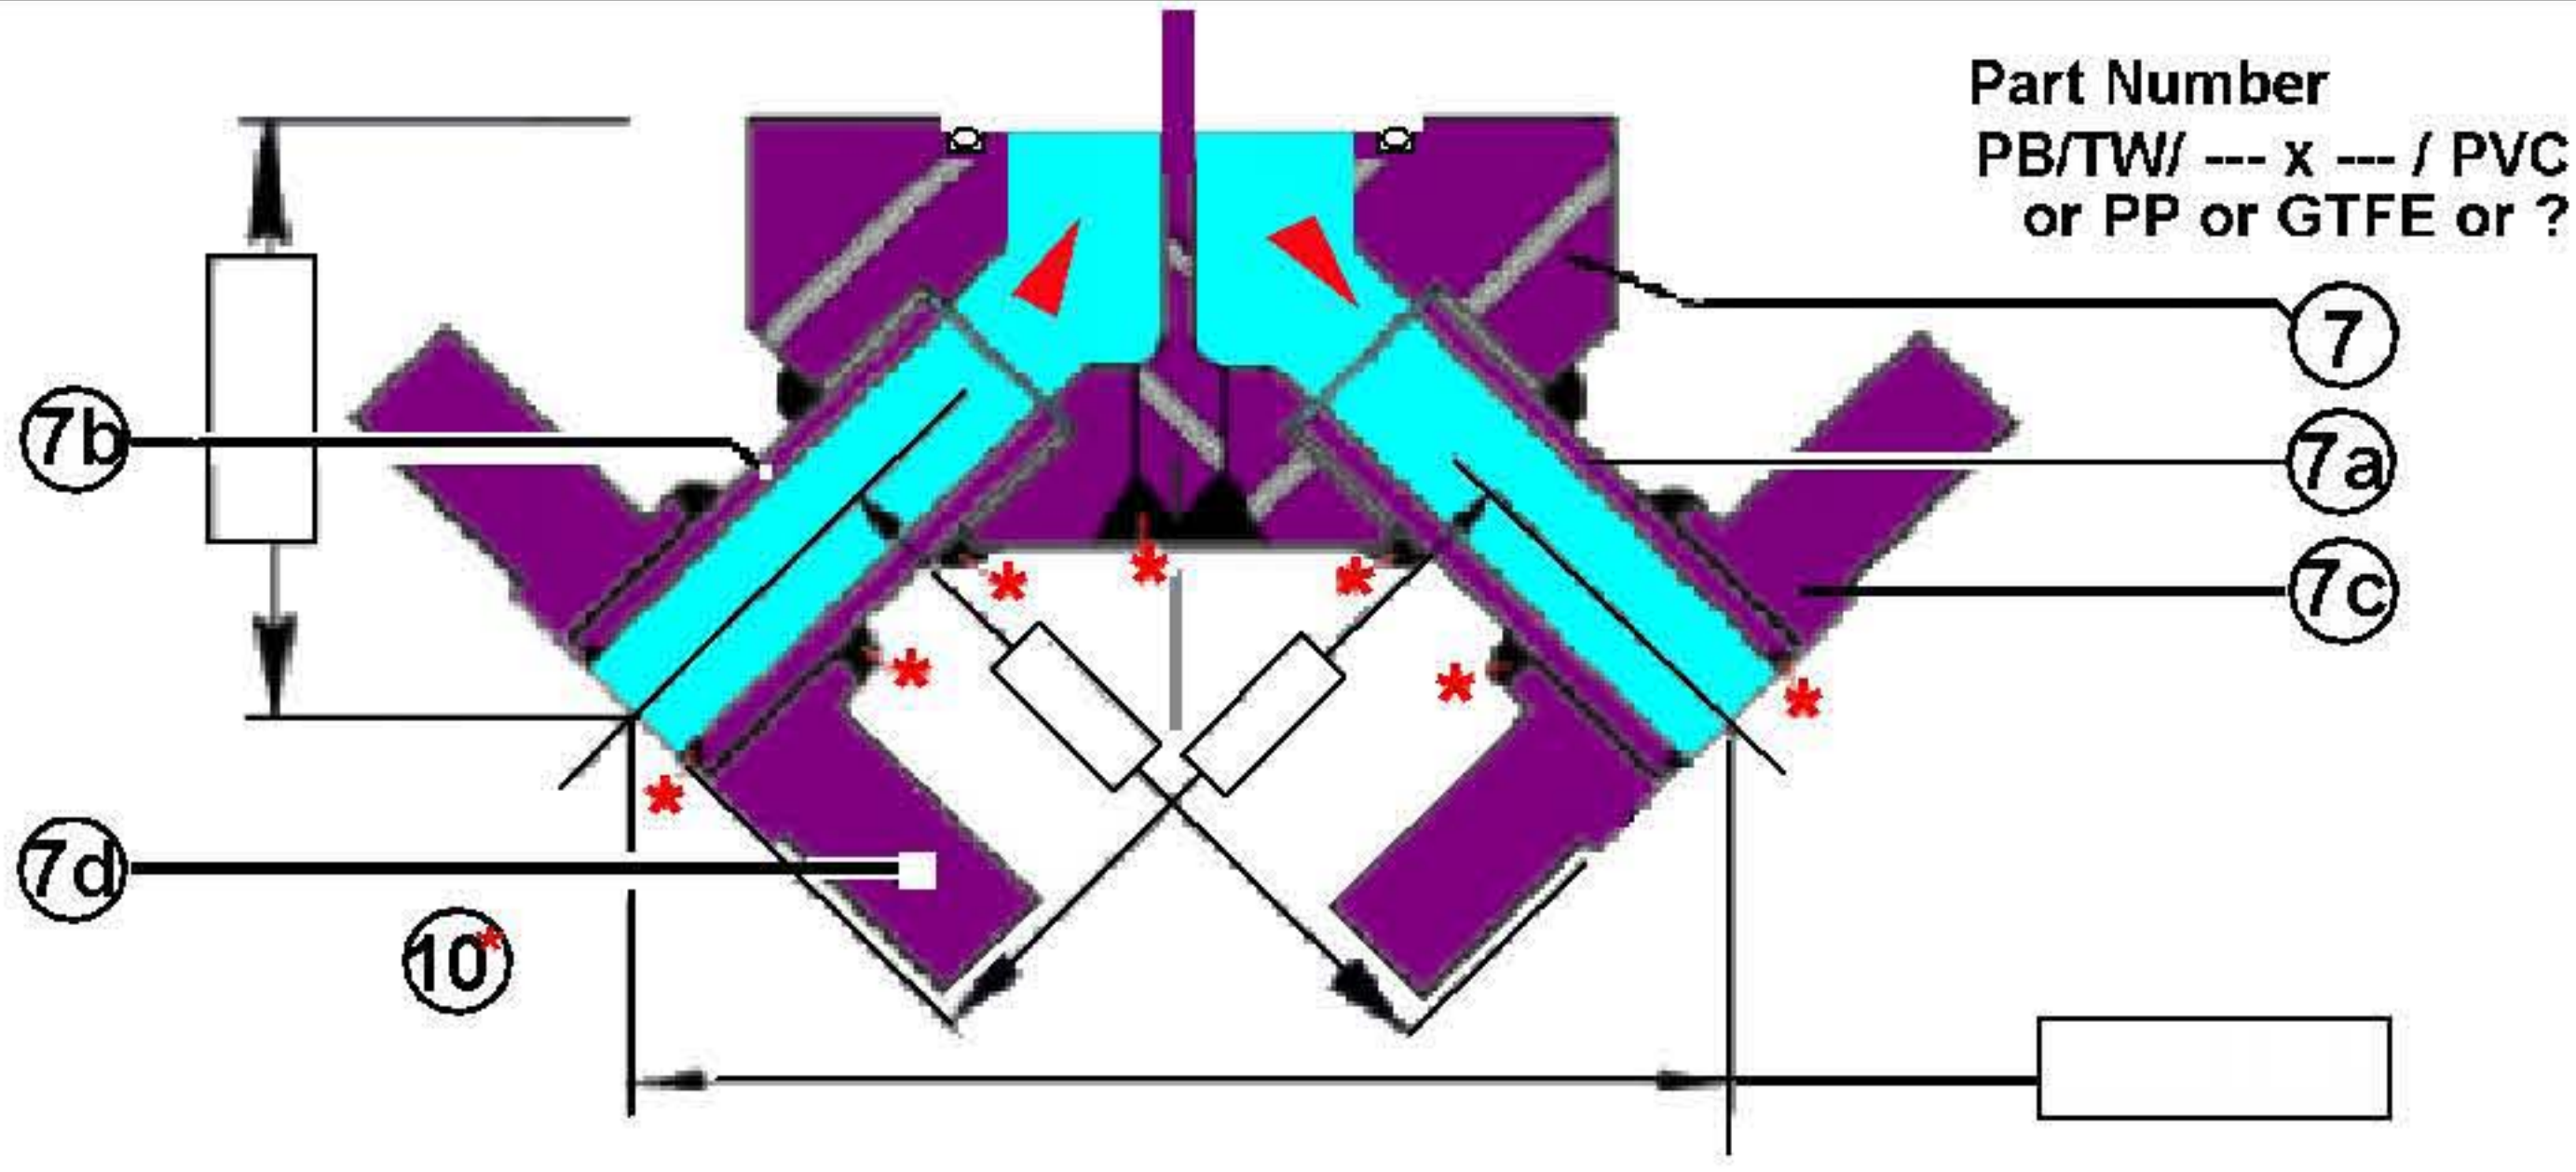

Item	Pt #	DESCRIPTION	Mtrl.	Ht./Cast/PO #	CUSTOMER
1	9019c type,	PREFILL VLV, IN WELDED BOSS	304ss		CUSTOMER Ref.
1a	9019c type,	PREFILL VLV, IN FAIL SAFE PIECE	304ss		3 Rd. Party QA \$s Extra
2	N2 PRE-FILL CUSHION HOUSING	HYDRO-FORGING	316L		DOCUMENTATION LEVEL \$s Extra
3	LIQUID SIDE 316L SS HYDRO-FORGING	PVDF LINED	316L+PVDF		WELDING, W Nbr. 100% GTAW
4	STAINLESS ALL-THREAD - 3 PLACES.		18-8		SHOP / JOB Nbr.
4a	MOUNTING NUTS AND WASHERS	3 PLACES	18-8		WEIGHT Est.
4b	BOLTS	9 PLACES	18-8		ISSUED By <i>TR</i> Date: / /
4c	NUTS AND WASHERS		18-8		CHECKED By Date: / /
5	LIQUID SIDE SUPPORT RING		516-70		FILE NAME
5a	PRE-FILL GAS SIDE SUPPORT RING		516-70		SCALE NOT TO SCALE
6	SPACER RING		316L		REVISION Nbr. Date: / /
7	PIPING BASE BLOCK	PLASTIC			DIMENSIONS: mm, Unless Otherwise Stated
7ab	PLASTIC PIPE	PVC, POLY PROPYLENE etc.			Sheet 1 of 1
7cd	PER CUSTOMER SPEC.				
8ab	"DW".....	FLEXFLON DIAPHRAGM & ANTI-EXTRUSION PLATE			OAL mm
8cd	"DF".....	VIRGIN PTFE FACED ELASTOMER BACKED DIAPHRAGM			Seg OD mm
9	POLY PROPYLENE WELD POINTS				

PulseGuard "Y-T" Block Connection Options
 Provides an "O" ring and bolts interface between a pipe system and the damper capsule, ensures flo-thru pressure wave interception, in place flushability, saves flange and "T", 37.5° butt weld to system.

Called - Weld connection angles to this system fitting C/L

The PulseGuard "Top Hat" allows flushing of pipe crud, and pipe hydro-test before the damper capsule is bolted on, may also be used to replace the damper during service.

PulseGuard <http://www.PulseGuard.com>
PulseGuard für Deutschland <http://www.PulseGuard.co.uk>
PulseGuard, de langue Francaise www.pulsationdaempfer.com
PulseGuard, en Espanol / sud America [amortiguador-de-pulsaciones.com](http://www.amortiguador-de-pulsaciones.com)
PulseGuard, dlya Russkogovoryaschih [pulsations-dampfer.com](http://www.pulsations-dampfer.com)

PulseGuard is the USA registered trade mark of PulseGuard Inc.
 PulseGuard is the UK registered trade mark of PulseGuard Ltd.
 UK --44(0)161-480-9625 USA ---1910-270-2737

PULSEGUARD
 For Americas & Pacific 01(1)910-270-2737
 For Europe & East --44(0)162-480-9625

VIEW NUMBER

