

MIXER SERIES SPECIFICATIONS

STENNER PUMPS



7.5-Gallon



15-Gallon



30-Gallon



MIXER MODELS

| Part Number | UM | Description |
|-------------|----|-----------------------|
| SMS75A | EA | 7.5-gallon, 120V 60Hz |
| SMS75B | EA | 7.5-gallon, 220V 60Hz |
| SMS15A | EA | 15-gallon, 120V 60Hz |
| SMS15B | EA | 15-gallon, 220V 60Hz |
| SMS30A | EA | 30-gallon, 120V 60Hz |
| SMS30B | EA | 30-gallon, 220V 60Hz |

MAXIMUM OPERATING TEMPERATURE

104° F (40° C)

MOTOR TYPE

1/30 HP, shaded pole, class B

VISCOSITY MAXIMUM

50 cps

DUTY CYCLE

Continuous

MOTOR VOLTAGE (AMP DRAW)

120V 60Hz 1PH (1.7 A @ 120/60/1)

220V 60Hz 1PH (0.9 A @ 220/60/1)

POWER CORD PLUG END

120V 60Hz NEMA 5/15

220V 60Hz NEMA 6/15

POWER CORD TYPE

SJTOW

MATERIALS OF CONSTRUCTION

Drive Enclosure Polycarbonate

Tank Mount PVC

Wetted Parts Nylon, Fiberglass, Santoprene[®]*, PE, PVC, NSF approved or FDA compliant; Hastelloy



DIMENSIONS AND SHIPPING WEIGHT

7.5-gallon 16 x 10 x 10 in. (40.6 x 25.4 x 25.4 cm); 6.5 lbs (2.9 kg)

15-gallon 22 x 10 x 10 in. (55.9 x 25.4 x 25.4 cm); 7 lbs (3.1 kg)

30-gallon 33 x 10 x 10 in. (83.8 x 25.4 x 25.4 cm); 7.5 lbs (3.4 kg)

* Santoprene[®] is a registered trademark of Exxon Mobil Corporation.

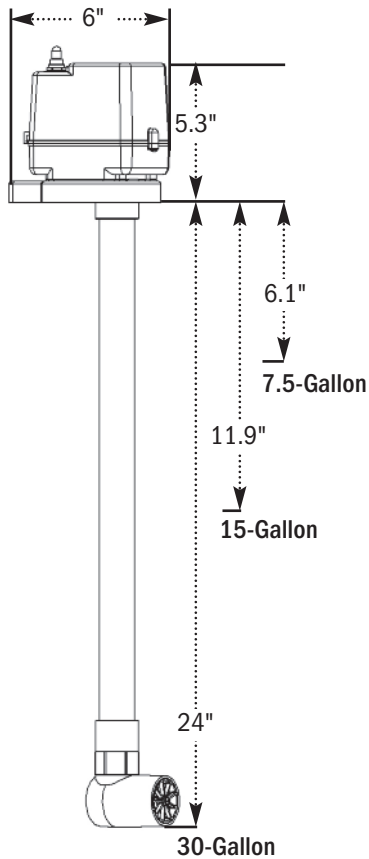

STENNER PUMP COMPANY

Jacksonville, Florida USA

www.stenner.com

© Stenner Pump Company All Rights Reserved